


T44 tape and reel

BERGSONNE LABS


Carrier tape · orientation · reel · dimensions in mm

12 mm · EIA-481

Carrier tape, top view

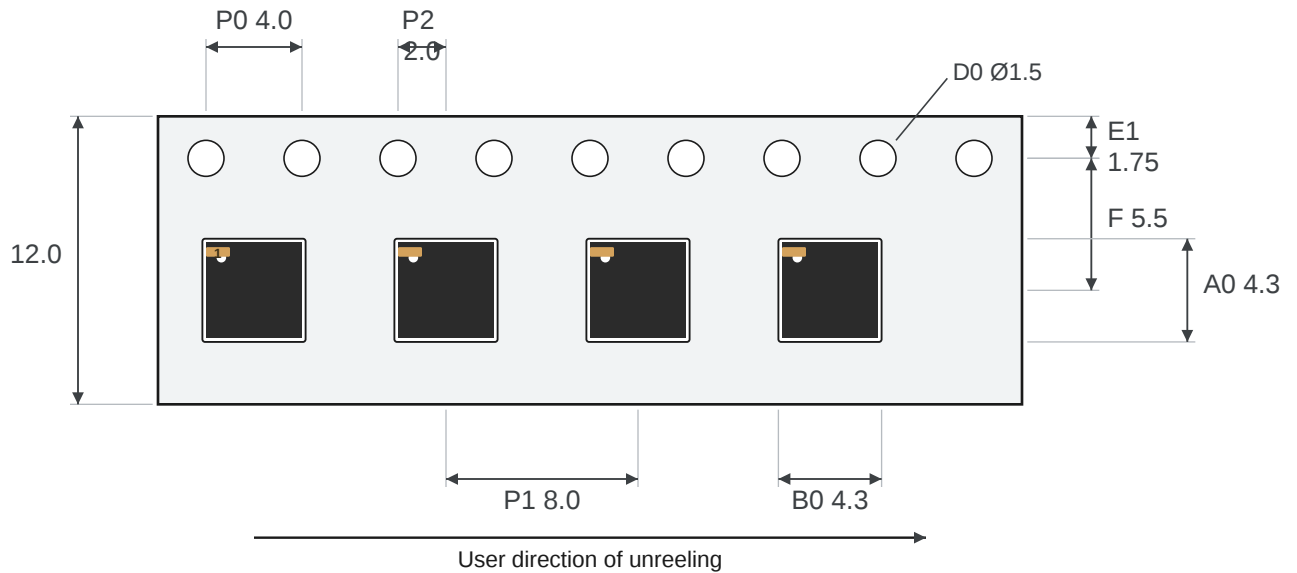


Section through a pocket

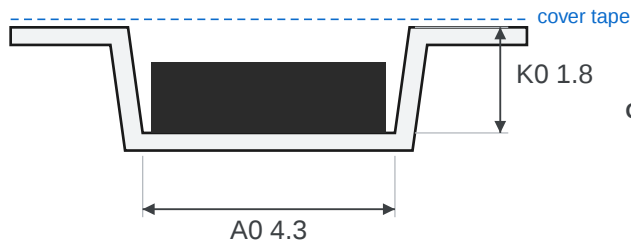


Tile height not to scale. Tiles taller than K0 need the deeper tape.

Orientation in the pocket (EIA-481 quadrants)

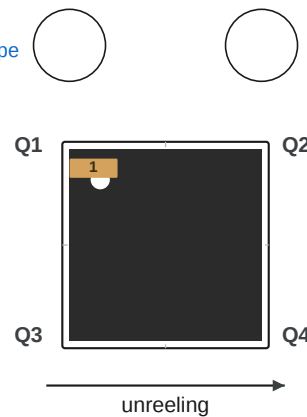

Sprocket holes up, tape unreeling to the right. The tile sits face up (marking dot visible) with pad 1, the keyed land, in quadrant 1: the upper-left corner, nearest the sprocket holes.

Reel

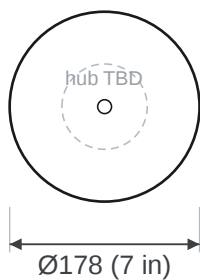

Method	Tape and reel, EIA-481
Carrier tape	Reel Company P2577, embossed, cold-seal cover tape
Pocket (A0 × B0 × K0)	4.3 × 4.3 × 1.8 mm
Pocket pitch (P1)	8.0 mm
Reel	7 in (178 mm), hub to be confirmed
Quantity per reel	500
Leader / trailer	400 mm min. / 160 mm min.
Pin 1	Quadrant 1 (keyed land toward the sprocket holes)

Applies to every T44 tile whose height fits the 1.8 mm pocket. Tape-specific values are the Real Reels spec; sprocket geometry (P0, P2, D0, E1, F) is EIA-481 for 12 mm tape. Nominal values, no tolerances shown.